


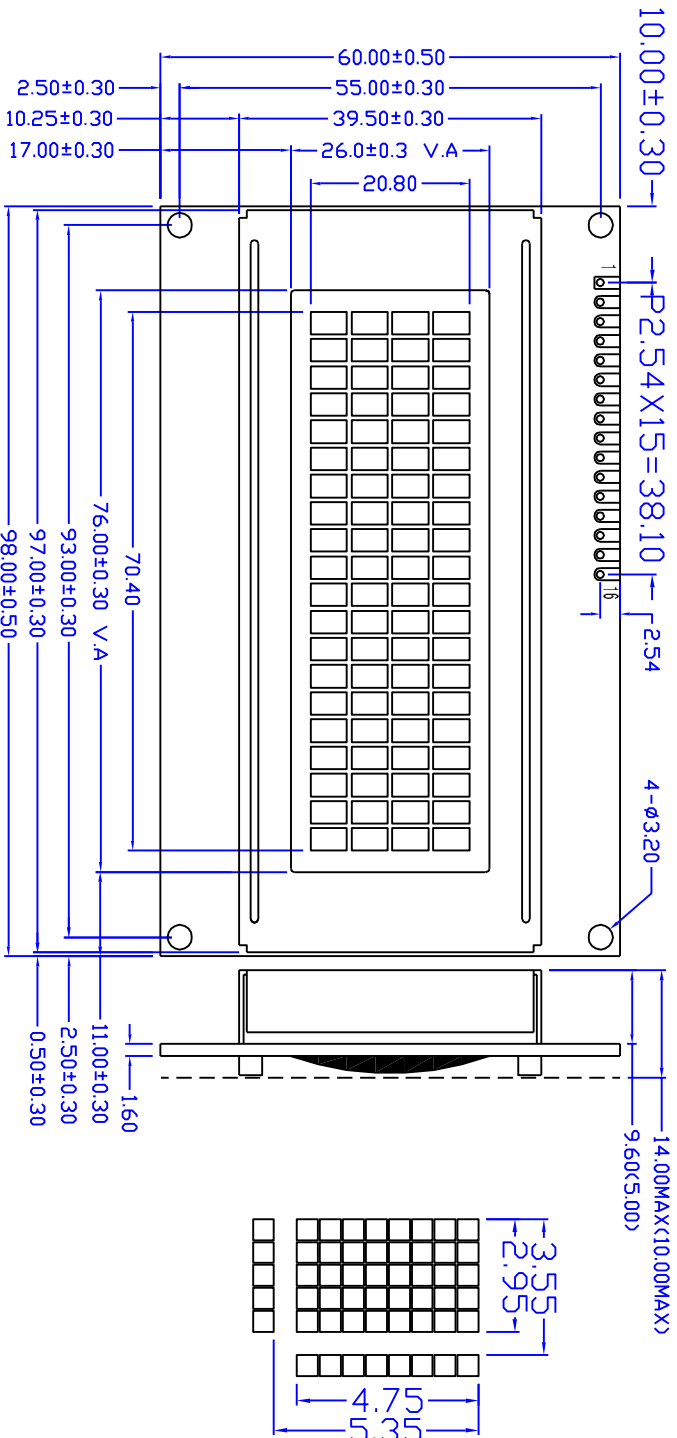

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	K(-)	A(+)

NOTES:

- 1.DISPLAY TYPE:

2.VIEWING DIRECTION:

3.POLARIZER MODE:

4.OPERATING TEMP:

5.STORAGE TEMP:

6.LCD OPERATING VOLTAGE:

7.DRIVE METHOD:

8.CONTROLLER:

9.BACKLIGHT:

10.ALL UNMARKED TOLERANCES: $\pm 0.3\text{mm}$

11.BEZEL(THICKNESS: 0.6mm) IS TO BE PAINTED BLACK
- STN/YELLOW -GREEN

6:00

TRANSPARENT/POSITIVE

$0^{\circ}\text{C} \sim +60^{\circ}\text{C}$

$-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$

18.5V

1/64DUTY 1/9BIAS

KS0108X2

LED(YELLOW -GREEN; 4.2DCV)

北京中显电子有限公司，www.zxlcd.com					
绘图:		型号:	ZX2004A	单位:	mm
审核:		版本号:	08V01	电话:	52926620
批准:		日期:		传真:	52926621