

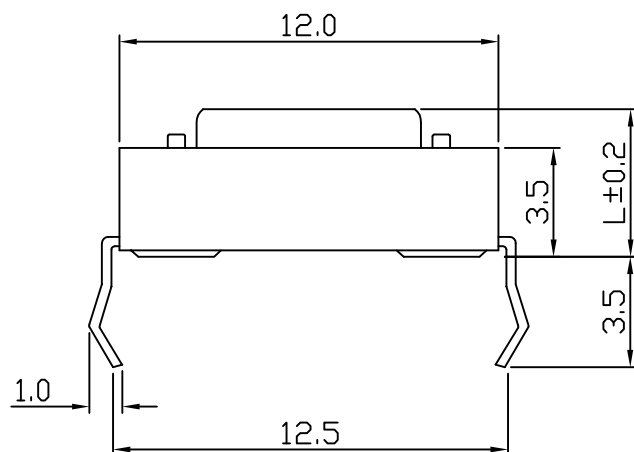



外形圖
Mechanical Dimensions

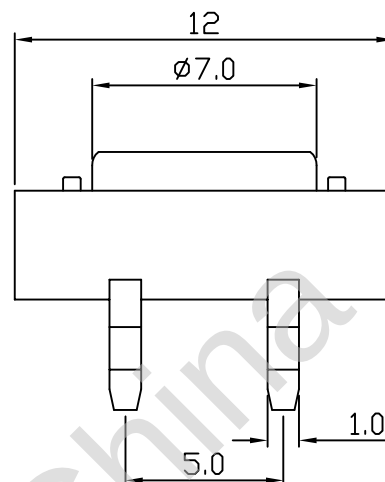

安裝孔位置圖
Mounting Hole

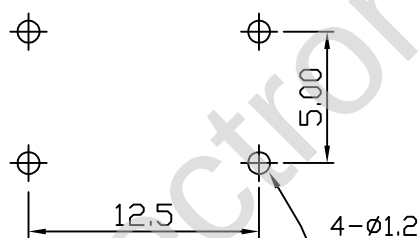

接線圖
Circuit Explanation



Mode NO.	Knob(L)
☒ T1103	4.3
☐ T1103A	5.0
☐ T1103N	6.0
☐ T1103B	7.0
☐ T1103C	7.5
☐ T1103M	9.0
☐ T1103D	10
☐ T1103Q	11
☐ T1103P	14
☐ T1103G	15
☐ T1103H	17
☐ T1103I	18
☐ T1103J	22
☐ T1103F	12

TOLERANCES UNLESS OTHERWISE SPEC 未注公差允許範圍	
BASIC DIMENSIONS 適用範圍	TOLERANCES 允許公差
UP TO 10	± 0.3
ABOVE 10 TO 30	± 0.5
ABOVE 30 TO 100	± 1.0
ANGULAR DIMENSION	± 5°

- 1、 Rating: DC 12V 50mA
- 2、 Travel:0.25±0.1mm
- 3、 Operating Force:250±50gf
- 4、 Contact Resistance:100mΩMax
- 5、 Insulation resistance: 100MΩ
- 6、 Withstand Voltage: 250VAC 0.5mA
- 7、 Life:60,000 cycles Min

惠州大唐電子工業有限公司		批准	審核	設計
制品型號	T1103-GP			
制品名稱	輕觸開關			