




PAKET NO(0)	A	B	C	適配線規	CONNECTION(40)
2	1.7	2.5	4.5	14#~16#	10Amps
4	2.7	3.6	5.0	10#~12#	20Amps
6	3.4	4.4	5.5	8#~10#	30Amps
8	4.6	5.6	5.5	6#~8#	40Amps

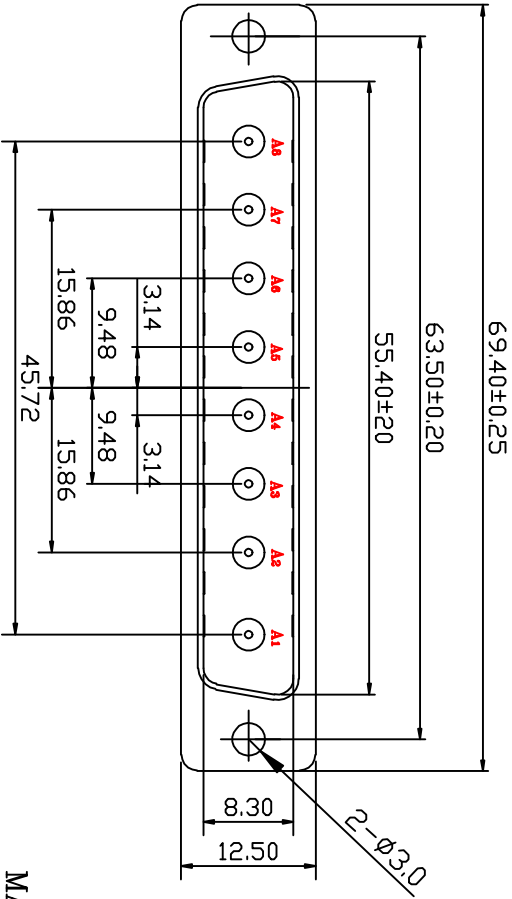

MATERIALS AND FINISH
SHELL : STEEL MATERIAL, TIN FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
HIGH POWER CONTACT MATERIAL: BRASS, 3u"/10u"/15u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 10,20,30R 40 AMPS
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C

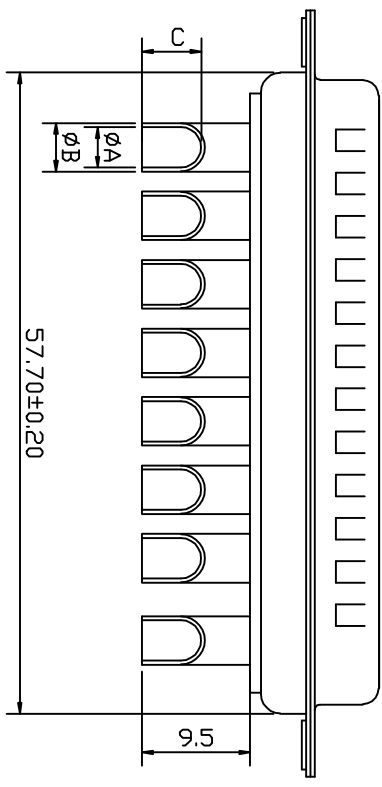

SCALL 1:1 SIZE: A4				41	
41				41	