

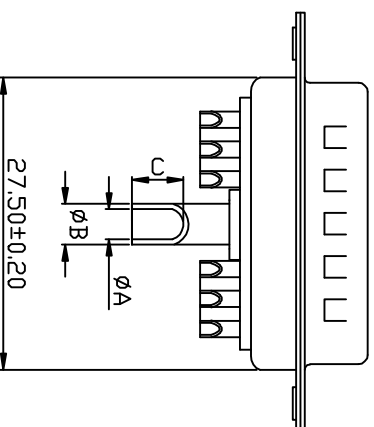


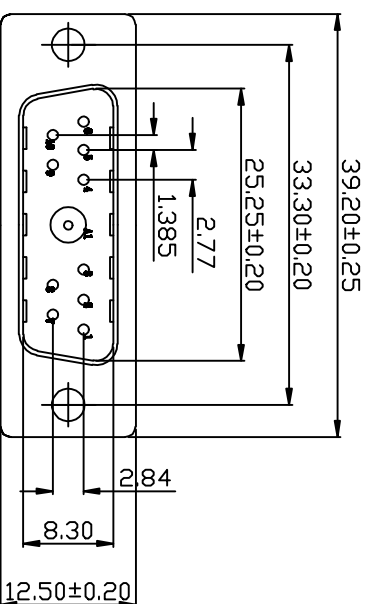

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
DIMPLES ON PLUG ONLY
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
COAXIAL INSULATOR : TEFLON UL 94V-0 WHITE COLOR
HIGH-POWER CONTACT MATERIAL: COPPER, 3U"/5U"/10U" GOLD PLATED
LOW-POWER CONTACT MATERIAL: BRASS, 1U"/2U" GOLD PLATED

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 10,20,30R040 AMPS
SIGNAL CONTACT RESISTANCE : 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 5000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C
COAXIAL CONTACT IMPEDANCE: 75 OHMS

NO	A $\pm$ 0.1	B $\pm$ 0.1	C $\pm$ 0.1	适配线频	电源强度(A)
2	1.7	2.5	4.5	14#~16#	10AMPS
4	2.7	3.6	5.0	10#~12#	20AMPS
6	3.4	4.4	5.5	8#~10#	30AMPS
8	4.6	5.6	5.5	6#~8#	40AMPS

[illegible]