
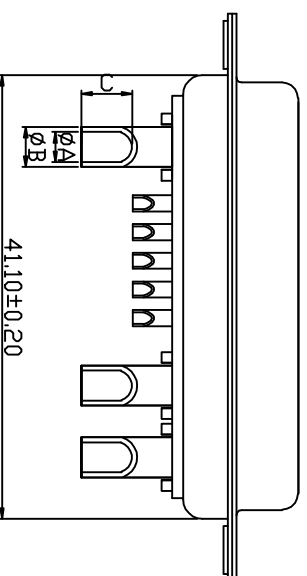
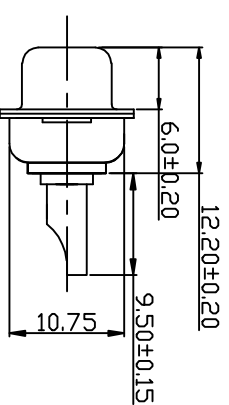


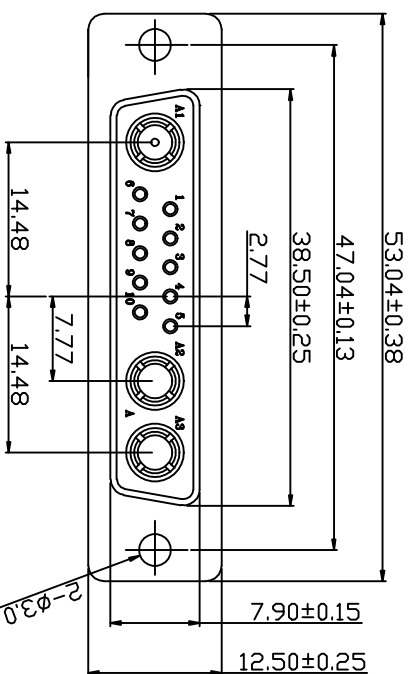

NO	A $\pm$ 0.1	B $\pm$ 0.1	C $\pm$ 0.1	適用線種	電流密度(A)
2	1.7	2.5	4.5	14#~16#	10AMPs
4	2.7	3.6	5.0	10#~12#	20AMPs
6	3.4	4.4	5.5	8#~10#	30AMPs
8	4.6	5.6	5.5	6#~8#	40AMPs

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
HIGH POWER CONTACT MATERIAL: COPPER, 3U"/5u"/10u" GOLD PLATED
LOW-POWER CONTACT MATERIAL: BRASS, 1u"/2u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING : 10, 20, 30R 40 AMPS
HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 2000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C

[illegible]