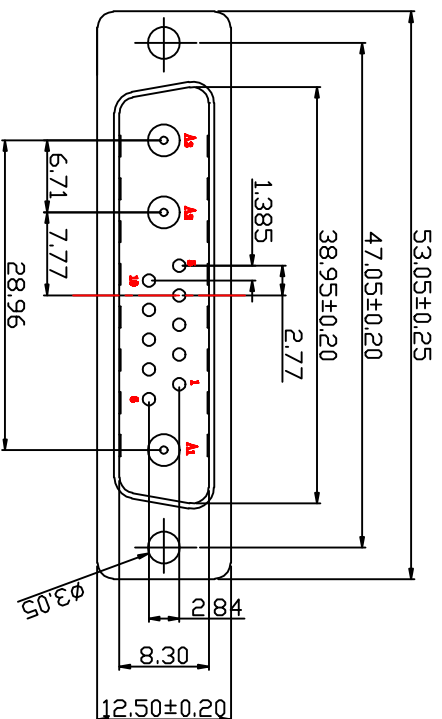


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED

DIMPLES ON PLUG ONLY

CONNECTOR INSULATOR : PBT THERMOPLASTIC,

30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR

HIGH POWER CONTACT MATERIAL: BRASS, 3U"/5U"/15u" GOLD PLATED

LOW-POWER CONTACT MATERIAL: BRASS, 1u"/2u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING :10,20,30R 40 AMPS


HIGH POWER CONTACT RESISTANCE : 2.7 MILLIOHMS MAX.

DIELECTRIC WITHSTANDING VOLTAGE :

1000 V AC FOR 1 MINUTE

INSULATION RESISTANCE : 5000 MEGAOHMS MIN.

TEMPERATURE RATING : $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

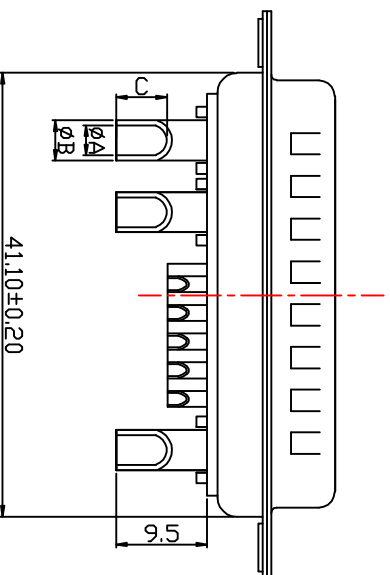

NO	A $\pm$ 0.1	B $\pm$ 0.1	C $\pm$ 0.1	適用設備	電源容量(A)
2	1.7	2.5	4.5	14#~16#	10AMPSS
4	2.7	3.6	5.0	10#~12#	20AMPSS
6	3.4	4.4	5.5	8#~10#	30AMPSS
8	4.6	5.6	5.5	6#~8#	40AMPSS

2	1	27T	1, 6			