
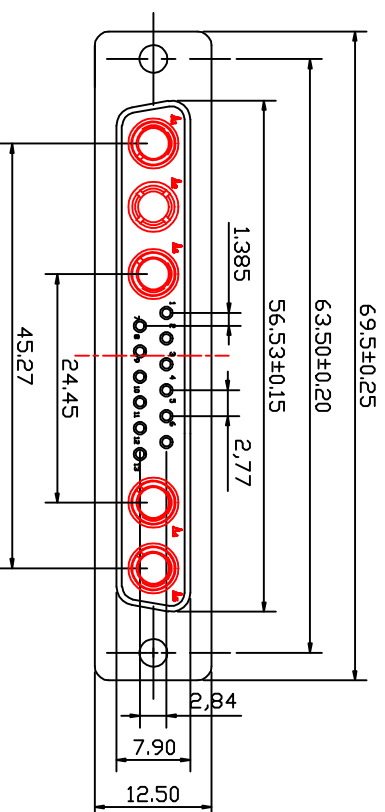


MATERIALS AND FINISH

SHELL : STEEL MATERIAL, TIN FINISHED
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR
HIGH POWER CONTACT MATERIAL: COPPER, 3u"/5u"/10u" GOLD PLATED
LOW-POWER CONTACT MATERIAL: BRASS, 1u"/3u" GOLD PLATED

ELECTRICAL CHARACTERISTICS

HIGH POWER CONTACT CURRENT RATING: 10,20,30R040 AMPS
HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE:
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.
TEMPERATURE RATING: $-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$

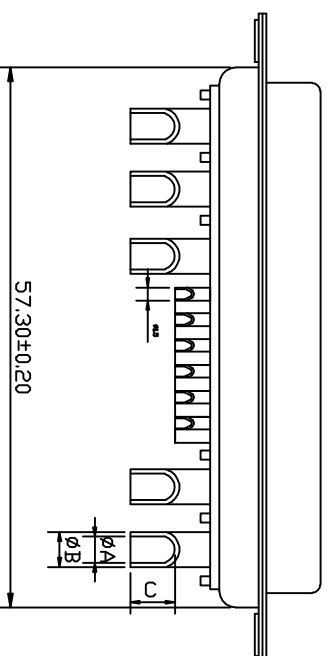

ND	A $\pm$ 0.1	B $\pm$ 0.1	C $\pm$ 0.1	通孔線種	電氣規格(A)
2	1.7	2.5	4.5	14#~16#	10AMPS
4	2.7	3.6	5.0	10#~12#	20AMPS
6	3.4	4.4	5.5	8#~10#	30AMPS
8	4.6	5.6	5.5	6#~8#	40AMPS

[illegible]