
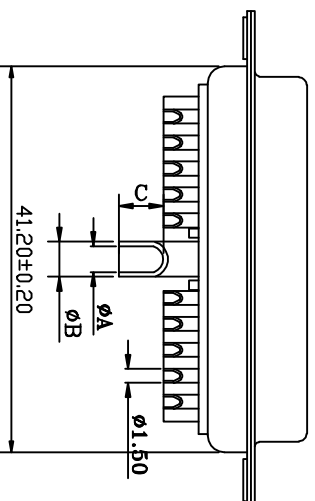



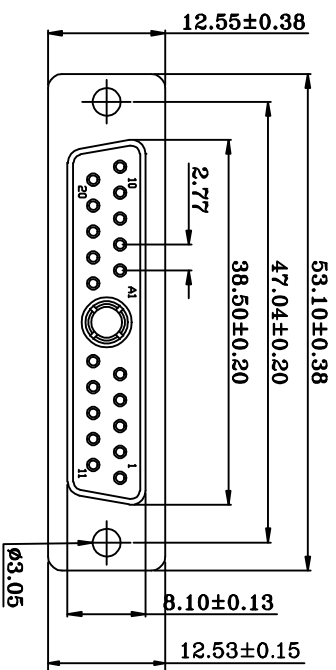

MATERIALS AND FINISH

SHELL : STEEL MATERIAL, T1N FINISHED
DIMPLES ON PLUG ONLY
CONNECTOR INSULATOR : PBT THERMOPLASTIC,
30% GLASS FILLED UL 94V-0 RATED BLACK COLOR
COAXIAL INSULATOR : TEFLON UL 94V-0 WHITE COLOR
HIGH-POWER CONTACT MATERIAL: BRASS, 3U"/5U"/10U"
LOW-POWER CONTACT MATERIAL: BRASS, 1U"/2U" GOLD PLATED

ELECTRICAL CHARACTERISTICS

SIGNAL CONTACT CURRENT RATING : 10,20,30 RO 40 AMPS
SIGNAL CONTACT RESISTANCE : 10 MILLIOHMS MAX.
DIELECTRIC WITHSTANDING VOLTAGE :
1000 V AC FOR 1 MINUTE
INSULATION RESISTANCE : 2000 MEGAOHMS MIN.
TEMPERATURE RATING : -55°C ~ +125°C
COAXIAL CONTACT IMPEDANCE: 75 OHMS

NO	A	B	C	運行時間	電流強度 (A)
2	1.7	2.5	4.5	1st 10h	10Amps
4	2.7	3.6	5.0	10st 12h	20Amps
6	3.4	4.4	5.5	8st 10h	30Amps
8	4.6	5.6	5.5	6st 8h	40Amps

[illegible]