
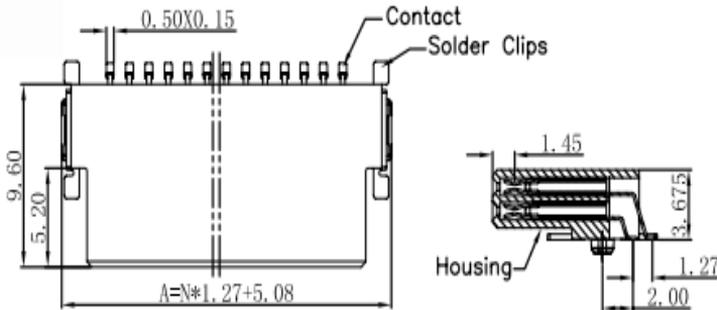


1.27mm Pitch Connectors, Female, Horizontal SMT Type


Insulat High Temperature
 Thermoplastic, LCP, UL 94V-0
Contact Material: stamped and formed, Phosphor Bronze
Clip Material: stamped and formed, Brass
Contact Plating: Au or PdNi+Au over Nickel
Clip Plating: Matt Sn over Nickel
Air- and creepage distance: 0.4mm
Contact resistance : 25 milliohms Max.
Insulator resistance : 10000 Megohms min.
Dielectric withstanding : AC 500V for 1 Minute.
Operating Temperature: -55°C to +125°C.
Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.

Mates with : 914.915
RoHS Compliant

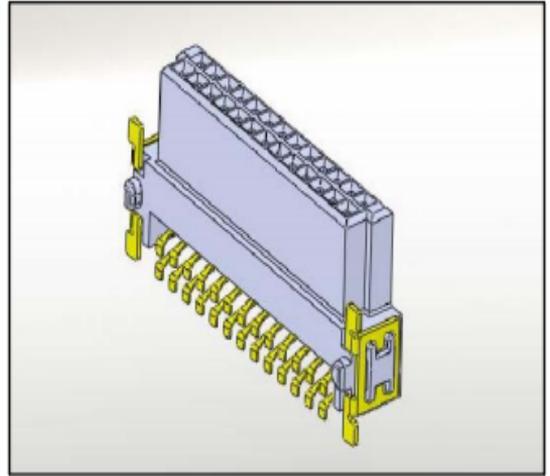

Current Rating :

No of pos	Ambient Temp		
	20°C	70°C	100°C
12	1.6A	1.1A	0.7A
26	1.3A	0.9A	0.6A
50	1.1A	0.8A	0.5A
68	1.0A	0.8A	0.5A
80	1.0A	0.8A	0.5A

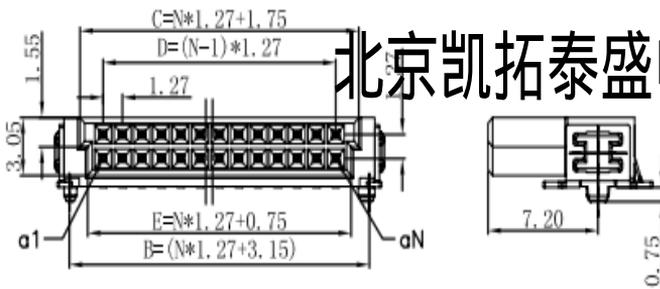

北京凯拓泰盛电子有限公司

