INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

VER	DETIAL DISCRIPTION	DATE
00	FIRST ISSUE	2011-7-11

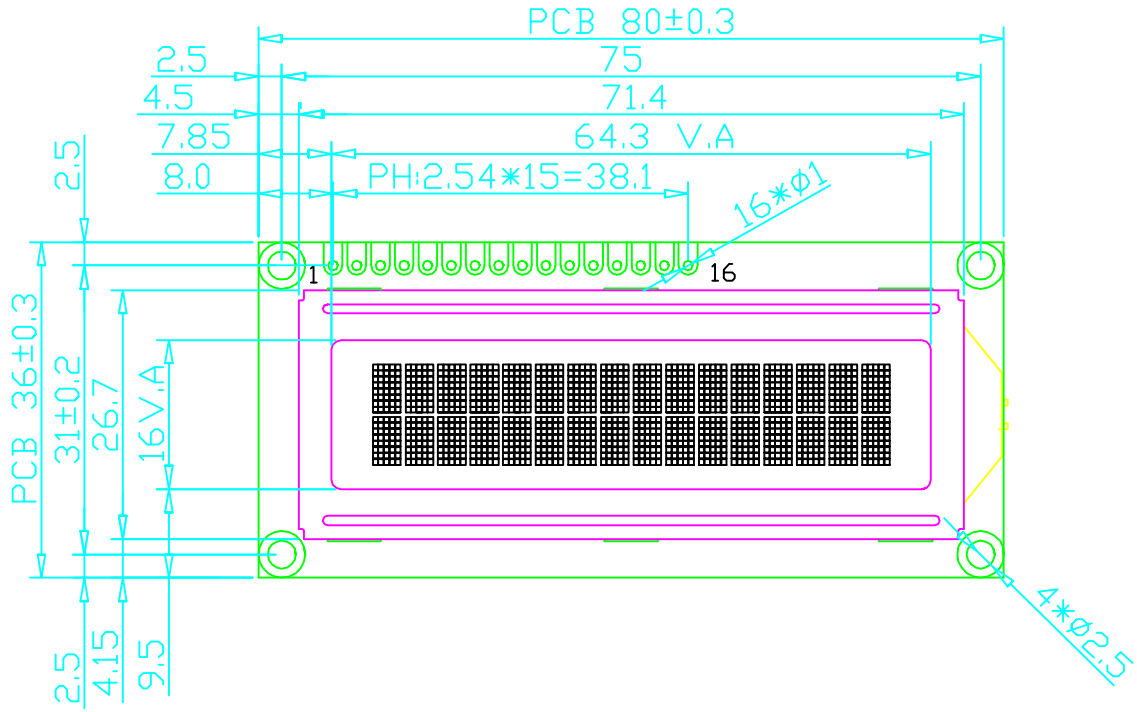

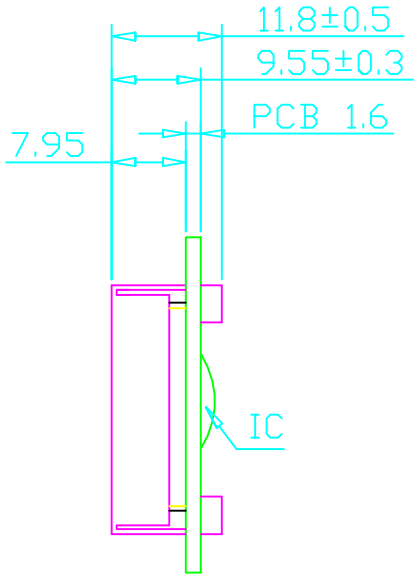



DOT SIZE:

SPECIFICATION:

1).STN(BLUE) /NEGATIVE/TRANSMISSIVE
2).DUTY:1/16. BIAS:1/5. VOP=5.0V
3).VIEWING ANGLE: 6 O'CLOCK
4).OPERATING TEMPERATURE: -20~70℃
STORAGE TEMPERATURE: -25~80℃
5).BACKLIGHT: WHITE I=20MA
6).DRIVE IC: SPLC780
7).DRIVE POWER: VDD=5.0V

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET: 1 Of 1
DESIGN BY:		WZQ	2011/7/11	LCM1602C		
CHECKED BY:						DATE: 2011/7/11
CUSTOM NO:				DO NOT SCALE THIS DRAWING.	PROJECTION	