


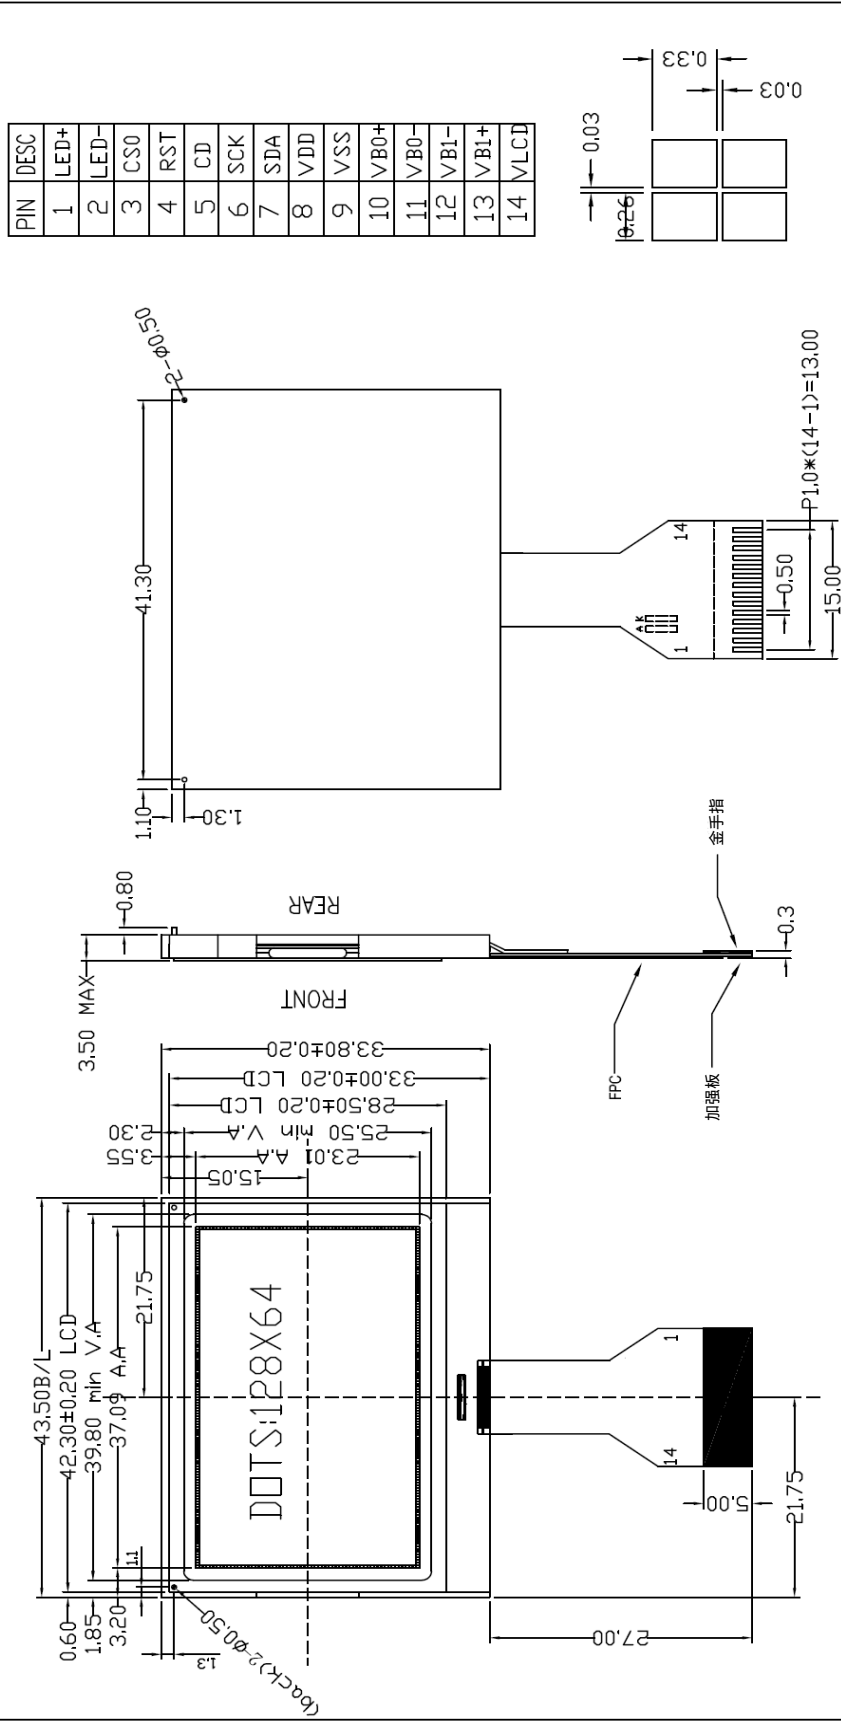

DISPLAY TYPE: FSTN/POSITIVE
POLARIZER: TRANSPARENT
VIEWING DIRECTION: 6:00-CLOCK
DRIVE METHOD: 1/64DUTY, 1/9BIAS
OPERATING VOLTAGE: LCM:3.0V, LCD:8.7V
OPERATING TEMP: -20~70 °C
STORAGE TEMP: -30~80 °C
CONNECTOR: COG
UNDESIGNED TOLERANCE: ±0.20
BACKLIGHT: WHITE, 3V, IF<45mA
DRIVER IC: UC1701X

REVISION RECORD		DATE	北京市瑞显电子科技有限公司	
1	FIRST	APPROVED	GEN. TOL: ±0.2	
2		Model No: RX12864-91	FIG(3)	
3		Part No: FOG+BL	VER: A	
4		DRAWN	DATE	SHEET: 1/1
5		CHECKED	DATE	UNIT: mm
6		APPROVED	DATE	SCALE: 1/1