

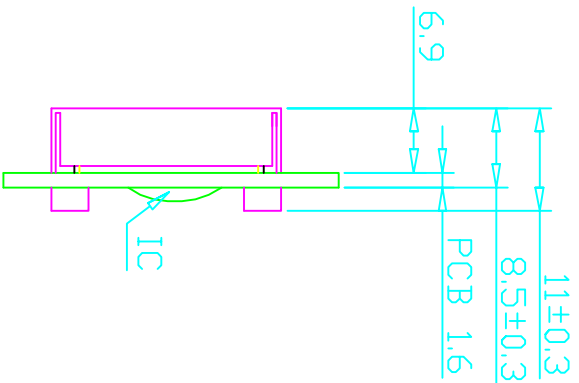


INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

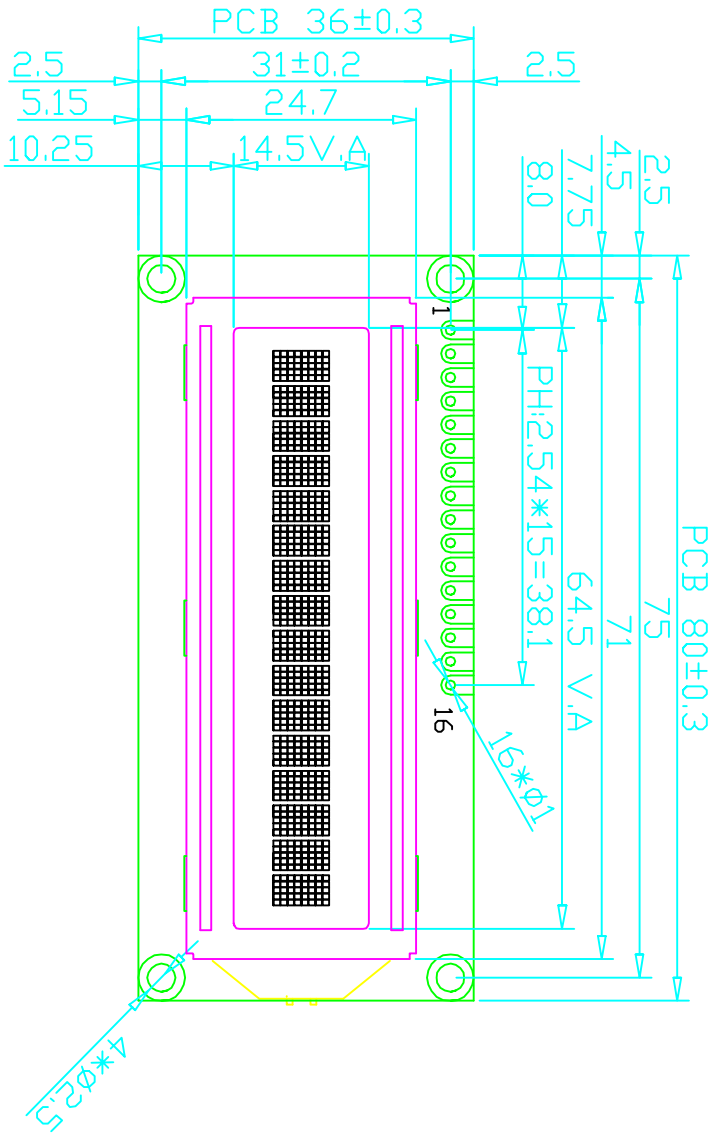

DOT SIZE:

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2011-11-28

- SPECIFICATION:
- 1).STN(BLUE) /NEGATIVE/TRANSMISSIVE
 - 2).DUTY:1/16. BIAS:1/5. VOP=4.7V
 - 3).VIEWING ANGLE: 6 0'CLOCK
 - 4).OPERATING TEMPERATURE: -20~70℃
STORAGE TEMPERATURE: -30~80℃
 - 5).BACKLIGHT: WHITE I=20MA
 - 6).DRIVE IC: SPLC780
 - 7).DRIVE POWER: VDD=5.0V

Unspecified Tolerance:	± 0.20	UNITS: mm	DATE:	MODE NUMBER :						
DESIGN BY:	WZQ	2011/11/28	LCM1601A							
CHECKED BY:										
CUSTOM NO:				DO NOT SCALE THIS DRAWING.			PROJECTION	DATE:	2011/11/28	
								SHEET:	1 OF 1	