


INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

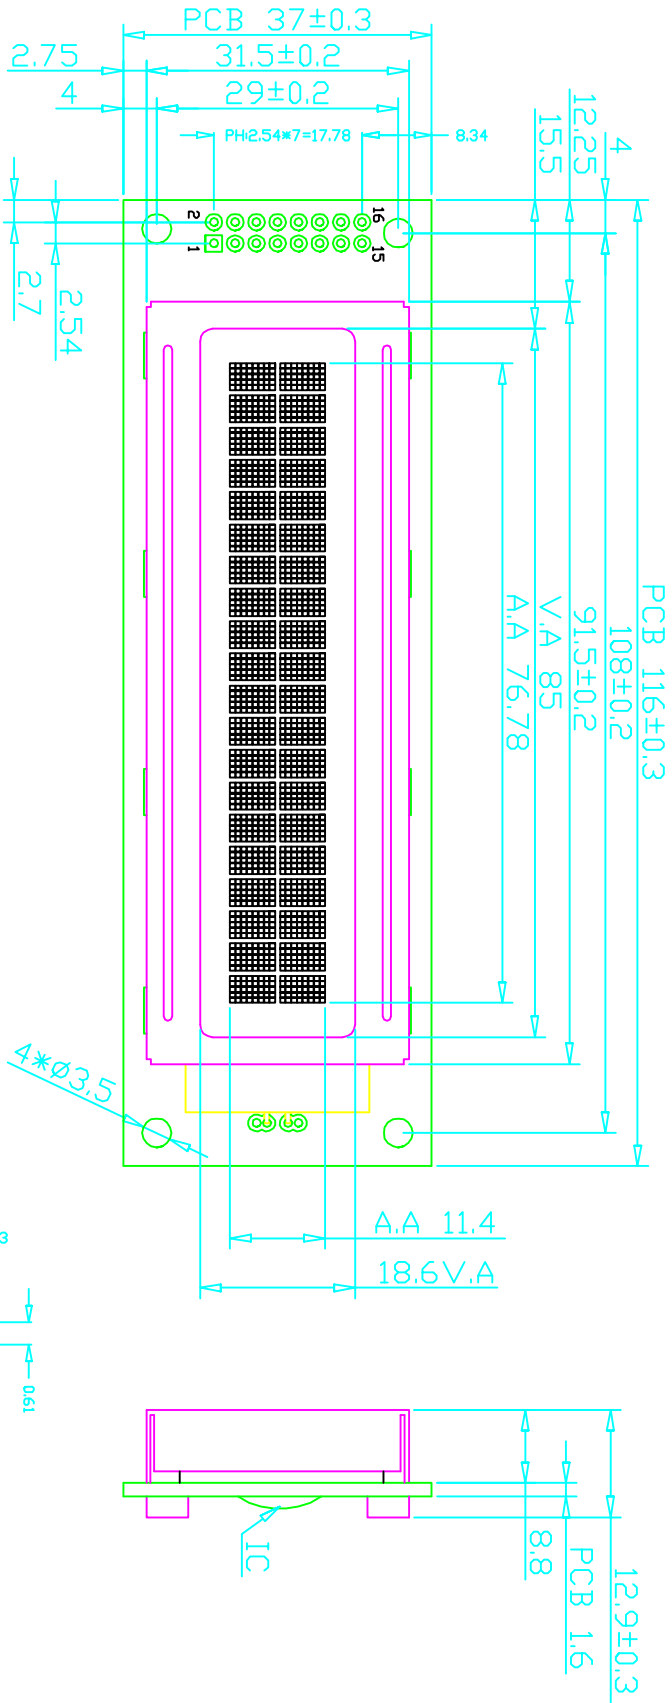

SPECIFICATION:

- 1).STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2).DUTY:1/16. BIAS:1/5. VOP=4.7V
- 3).VIEWING ANGLE: 6 0'CLOCK
- 4).OPERATING TEMPERATURE: -20~70℃
STORAGE TEMPERATURE: -30~80℃
- 5).BACKLIGHT: WHITE I=40MA
- 6).DRIVE POWER: VDD=5.0V

VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-11-7

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:			SHEET:	1 OF 1
DESIGN BY:	WZQ	2011.11.7	LCM2002A				DATE:	2011.11.7
CHECKED BY:						PROJECTION		
CUSTOM NO.:				DO NOT SCALE THIS DRAWING.				