

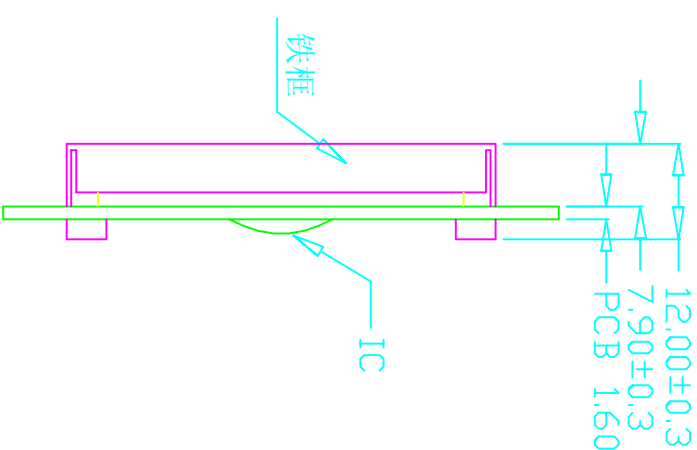


IF	SOMBLE
1	FG
2	VSS
3	VDD(5V)
4	V0
5	/MR
6	/RD
7	/CE
8	C/D
9	RST
10	DB0
11	DB1
12	DB2
13	DB3
14	DB4
15	DB5
16	DB6
17	DB7
18	FS
19	LED-A(5V)
20	LED-K

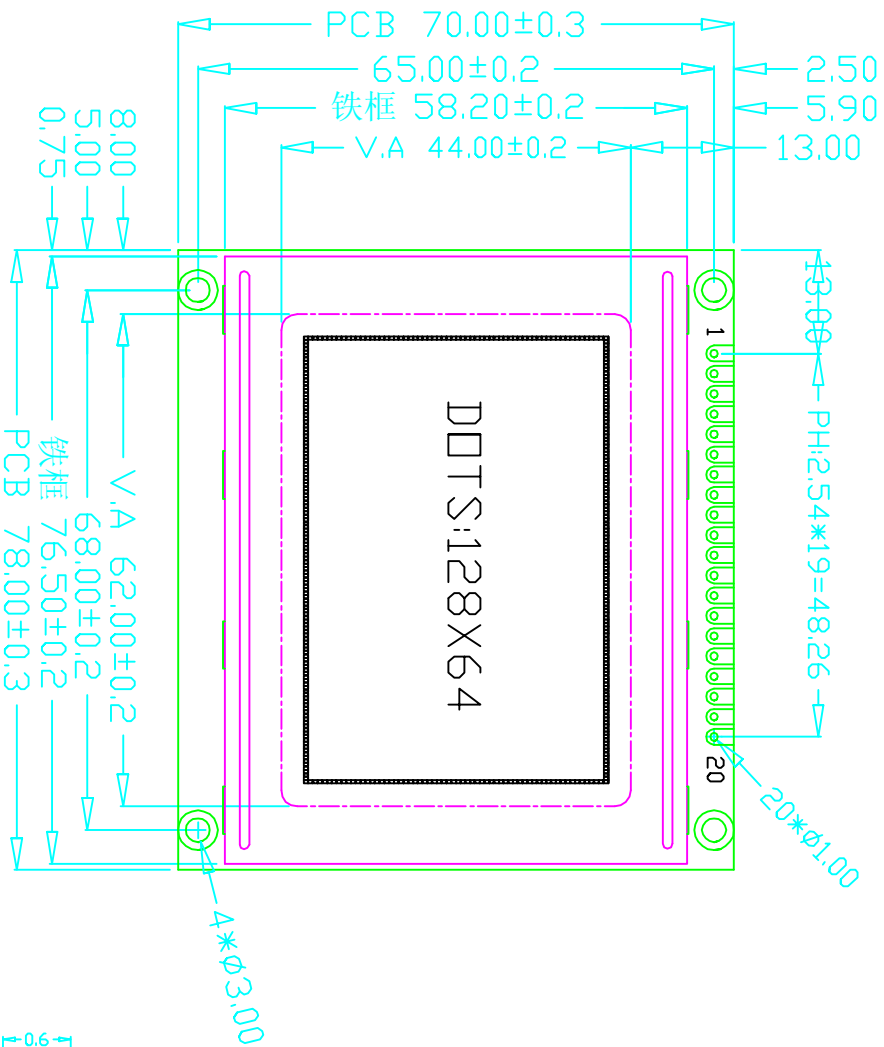

DOT SIZE:

SPECIFICATION:

- 1).STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2).DUTY:1/64. BIAS:1/9. VOP=9.0V
- 3).VIEWING ANGLE: 6 0'CLOCK
- 4).DRIVE VOLTAGE: 5.0V
- 5).OPERATING TEMPERATURE: -20~70℃
STORAGE TEMPERATURE: -30~80℃
- 6).BACKLIGHT: WHITE I=80MA
- 7).DRIVE IC: 6963

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2011-9-24

Unspecified Tolerance: ±0.20				MODE NUMBER:		SHEET: 1 OF 1	
DESIGN BY:	WZQ	DATE:	2011/9/24	LCM12864F		DATE: 2011/9/24	
CHECKED BY:		DO NOT SCALE THIS DRAWING.		PROJECTION			
CUSTOM NO:							