


INTERFACE	
1	GND
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	/REST
18	VOUT
19	LED-A(+5V)
20	LED-K

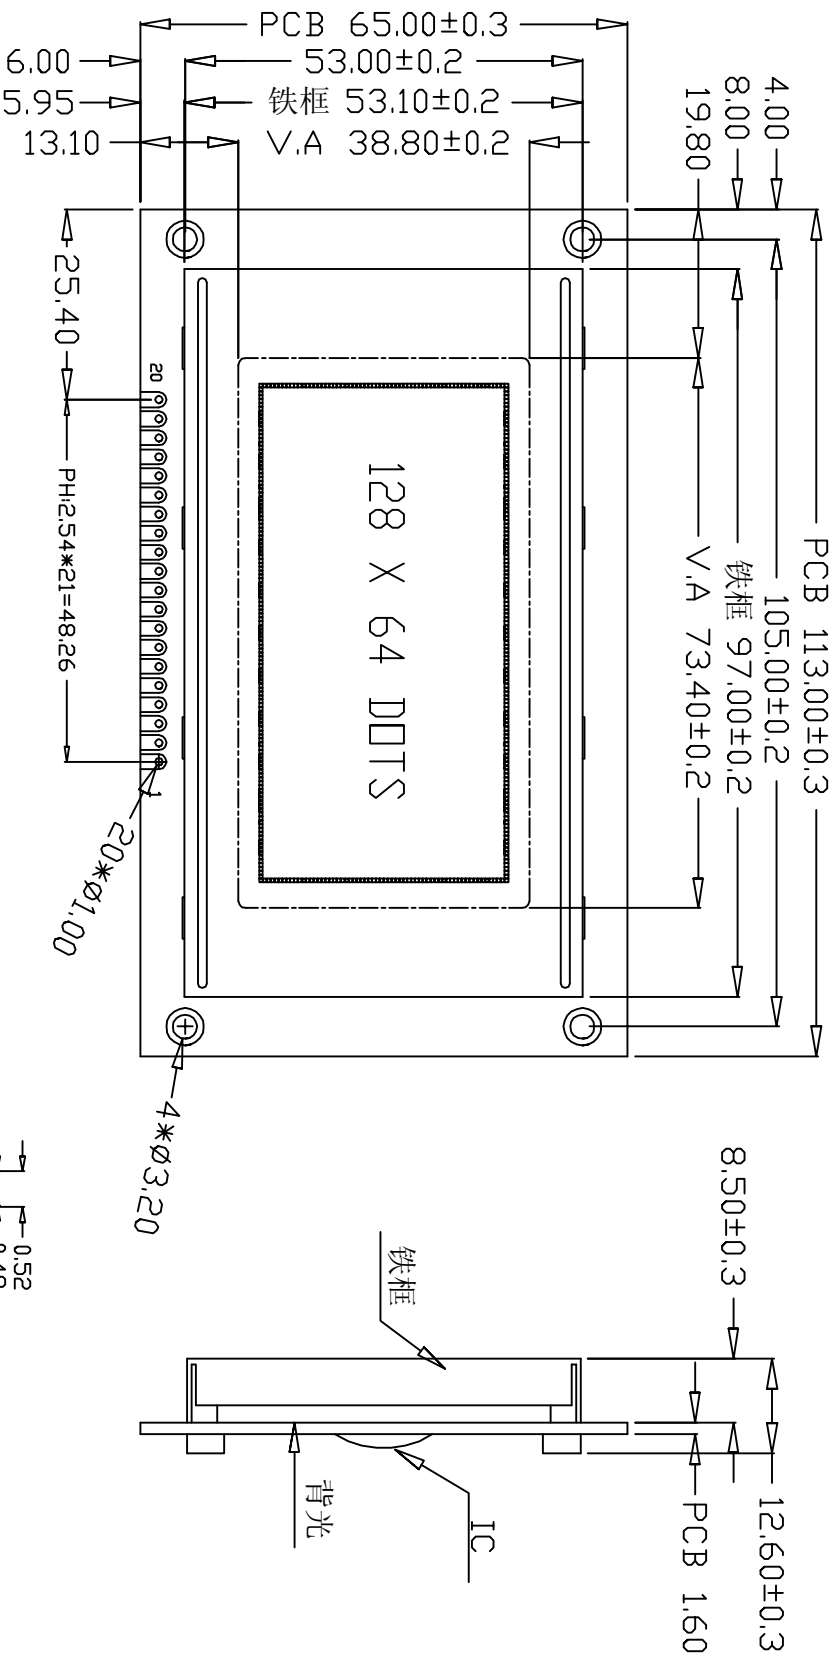

SPECIFICATION:

- 1).STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2).DUTY:1/64. BIAS:1/9. VOP=10.5V
- 3).VIEWING ANGLE: 6 0'CLOCK
- 4).DRIVE VOLTAGE: 5.0V
- 5).OPERATING TEMPERATURE: -20~70℃
STORAGE TEMPERATURE: -30~80℃
- 6).BACKLIGHT: WHITE I=80MA
- 7).DRIVE IC: 0108, 0107

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2011-10-10

Unspected tolerance	±0.20	UNITS: mm	DATE:	MODE NUMBER:	PROJECTION	SHEET:	1 of 1
DESIGN BY:	WZQ	2011/10/10		LCM12864A			
CHECKED BY:							
CUSTOM NO:				DO NOT SCALE THIS DRAWING.		DATE:	2011/10/10